



TECHNICAL DATA SHEET

2400 Boston Street | Suite 200 | Baltimore, MD | 21224

DAP® LANDSCAPE ADHESIVE FOAM – Black Color

PRODUCT DESCRIPTION

DAP® Landscape is a black color foam formulated to retain its dispensed color and blend naturally into surrounding landscape, even when exposed to direct sunlight. It bonds quickly to porous or non-porous rock, stone, cement, wood and cloth and is ideal for replacing loose mortar in rock walls. Landscape can also be used to direct water flow in pond or waterfall applications and is safe for use around fish or plants.



Meets ASTM E84/UL 723, Class A
Fire Rated, UL Classified

PACKAGING	Case	COLOR	UPC
12 oz (340g) Can	12	Black	7565040440

KEY FEATURES & BENEFITS

- Bonds with rock, stone, wood and most pond materials



TECHNICAL DATA SHEET

2400 Boston Street | Suite 200 | Baltimore, MD | 21224

- Black foam blends into shadows
- Won't discolor like conventional foam – no painting needed
- Expands to fill gaps and voids
- Easier and less expensive than mortar
- Superior adhesion
- Water Resistant
- Stop & restart adapter plus extra straw for more projects and extended reusability
- Interior / exterior use

SUGGESTED USES

USE TO FILL AND SEAL:

- Holes in trees
- Crafting
- Exterior gaps / voids in foundations retention walls, crawlspaces
- Stone and concrete adhesive
- Directing water flow in ponds, waterfalls
- Pots for securing artificial plants

FOR BEST RESULTS

- Apply in temperatures between 60°F- 100°F
- Surface must be clean, dry, and free of all foreign material for adhesion
- Dispense in the UPSIDE-DOWN position
- Apply in spaces with 40% relative humidity or greater

APPLICATION

DIRECTIONS: Important – read all directions and cautions before use. Always wear gloves, eye protection and work clothes. Use drop cloths. Product is flammable during dispensing – turn off sources of ignition prior to use

Preparation: To promote adhesion surface must be free of oil and dirt. Assemble straw and adapter, then carefully screw the trigger assembly onto valve. With trigger assembly attached, shake well for 30 seconds. Holding the can upside-down, slowly activate trigger until foam begins to dispense. Important: Before starting the job, first practice dispensing onto scrap materials.

Application: For best results this product should only be dispensed in the UPSIDE-DOWN position and apply in spaces with 40% greater relative humidity. Fill gap no more than 1/3 full, allowing room for expansion. Do not overfill. Important: Foam will continue to dispense for a few seconds after releasing the trigger – keep the straw tip moving to reduce the possibility of overfilling. Foam is tack-free in 30 minutes and dries in 4 hours. Excess foam can be trimmed and finished as necessary. Direct sunlight discolors foam if not painted or covered.



TECHNICAL DATA SHEET

2400 Boston Street | Suite 200 | Baltimore, MD | 21224

Clean-up: If wet foam contacts skin, clean immediately with a dry rag – do not use water – water accelerates curing. Cured foam must be removed mechanically from surfaces. Uncured foam can be cleaned from most surfaces with Foam Cleaner or acetone. If foam dries on skin, apply generous amounts of petroleum jelly, put on plastic gloves and wait 1 hour. With a clean cloth, firmly wipe off residue and repeat process if necessary. DO NOT use acetone or other solvents to remove product from skin.

Storage/Re-Use: Stop & restart up to 6 weeks later. To store unused portion, bend straw back onto the knob atop the dispensing trigger. Store can upright below 90° F (33°C). Product can be reused within three weeks if stored properly. To re-use, cut the end of the straw (removing any cured foam), shake well and apply as directed above. Second straw provided for total reusability up to 6 weeks.

TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Yield per can (3/8" bead) ASTM C1536	410 linear feet
Dry Time/ tack free	< 30 minutes
Cure Time	4 hours
Shelf Life	18 months (unopened)
Application Temperature Range	60°F to 100°F (16°C ~ 38°C)
Cuttable	< 2 hours
International Building Code	compliant
International Residential Code	compliant
UL Classified Caulking & Sealants	Listed
UL 723 Surface Burning Characteristics Fire Test (Flame/Smoke)	10/15
R-Value	4 - 5

SAFETY

See product label or Safety Data Sheet (SDS) for health and safety information. You can request an SDS by visiting our website at dap.com or calling 888-DAP-TIPS.

WARRANTY

LIMITED WARRANTY: If the product fails to perform when used as directed, within one year from the date of purchase, call 888-DAP-TIPS, with your sales receipt and product container available, for replacement product or sales price refund. DAP Products Inc. will not be responsible for incidental or consequential damages.



TECHNICAL DATA SHEET

2400 Boston Street | Suite 200 | Baltimore, MD | 21224

COMPANY IDENTIFICATION


Manufacturer: DAP Products Inc., 2400 Boston Street, Baltimore, Maryland 21224

Usage Information: Call 888-DAP-TIPS or visit dap.com & click on "Ask the Expert"

Order Information: 800-327-3339 or orders@dap.com

Fax Number: 410-558-1068

Also, visit the DAP website at dap.com

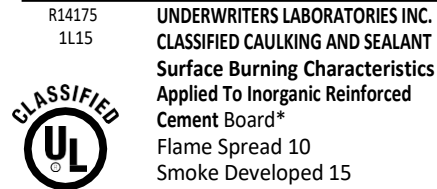

*TESTED AS APPLIED IN TWO ¾" DIAMETER
BEADS 8" ON CENTER COVERING 8.3% OF THE
EXPOSED TEST SAMPLE AREA.